

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary



50Ω TERMINATED 18 GHz SMA LATCHING S.P.8 T. SWITCH

Page
1 / 2

OPTIONS: INDICATOR / SUPP.DIODES

RF CHARACTERISTICS

NUMBER OF WAYS : 8
FREQUENCY RANGE : 0 - 18 GHz
IMPEDANCE : 50 Ohms

FREQUENCY (GHz)	0 - 3	3 - 8	8 -12.4	12.4- 16	16 - 18
V.S.W.R <=	1.20	1.30	1.40	1.50	1.60
INSERT. LOSS <=	0.20 dB	0.30 dB	0.40 dB	0.55 dB	0.60 dB
ISOLATION >=	80 dB	70 dB	60 dB	60 dB	60 dB
AVER. POWER (*)	240 W	150 W	120 W	110 W	100 W

TERMINATION IMPEDANCE : 50 Ohms
TERMINATION AVG. POWER AT 25° C : 1 W per termination
3 W total power

ELECTRICAL CHARACTERISTICS

ACTUATOR : LATCHING
NOMINAL CURRENT AT 25° C (*10%) : 125 mA / RESET : 1000 mA (**)
ACTUATOR VOLTAGE (Vcc) : 28V (24 to 30V) / POSITIVE COMMON
TERMINALS : 25 pins D-SUB male connector
INDICATOR RATING : 1 W / 30 V / 100 mA


MECHANICAL CHARACTERISTICS

CONNECTORS : SMA female per MIL-C 39012
LIFE : 2.000.000 cycles per position
SWITCHING TIME (nominal voltage;25° C) : < 15 ms
CONSTRUCTION : splashproof
WEIGHT : < 280 g

ENVIRONMENTAL CHARACTERISTICS


OPERATING TEMPERATURE RANGE (°C) : -40 , +85
STORAGE TEMPERATURE RANGE (°C) : -55 , +85

(* : average power at 25° C per RF path)
(** RESET : supply voltage time 1sec. max./duty cycle 10%)

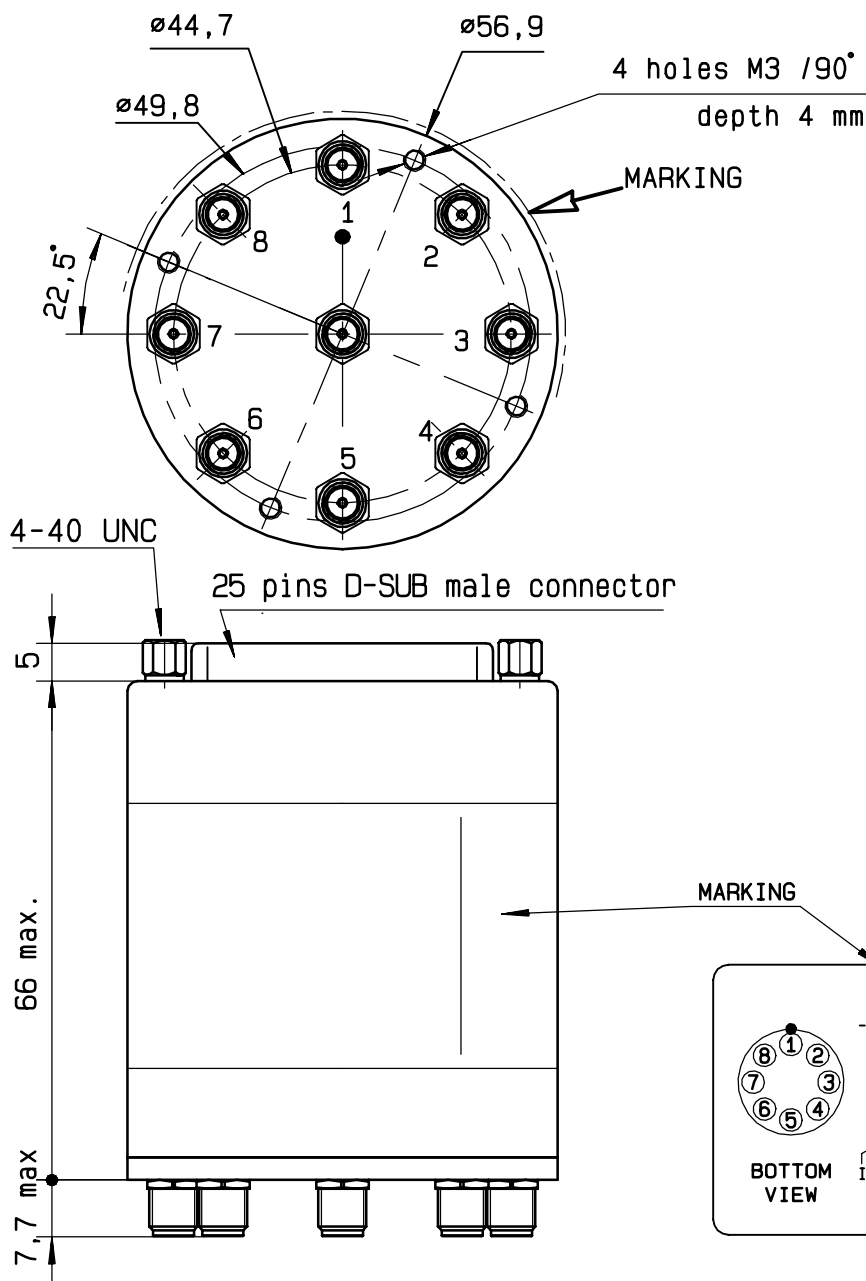

Voltage	RF continuity	Ind.
+C -RESET	All ports open	--
+C -1	IN $\leftrightarrow$ 1	D.E
+C -2	IN $\leftrightarrow$ 2	D.F
+C -3	IN $\leftrightarrow$ 3	D.G
+C -4	IN $\leftrightarrow$ 4	D.H
+C -5	IN $\leftrightarrow$ 5	D.I
+C -6	IN $\leftrightarrow$ 6	D.J
+C -7	IN $\leftrightarrow$ 7	D.K
+C -8	IN $\leftrightarrow$ 8	D.L

MARKING TOP VIEW (TERMINALS)

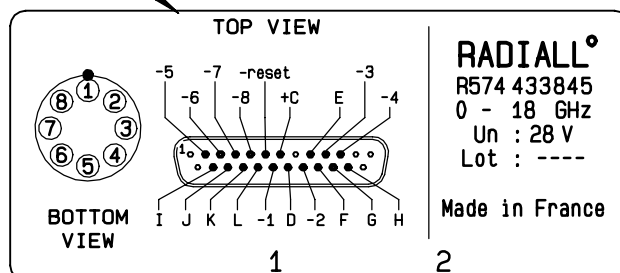

SCHEMATIC DIAGRAM

